



TWO VALVES PROTECTION CABINET DN52

Universal model – supply can be connected from the right or left. Cabinet can be made in surface or recessed version. Special rotary, made according to PN-B-02861 (for a light fire axe).

Dimensions (width x height x depth) [mm]:

350x700x220

Version:

- For wall-mounting or for recess-mounting

Implementation:

- Cabinet made of low carbon steel, electrolytically galvanized DC01 with a thickness of min. 0,6 mm, painted RAL3000 (red) or RAL9010 (white),
- Door with 180° opening angle
- Corrosion protection - zinc coating with a thickness of min. 3µm on side
- Universal gras hinge system - right or left hand door (for customer to choose)

Lack type:

- Special rotating type lock, made according to PN-B-02861 (for a light fire axe)

Equipment:

- Two winding valves, brass or aluminium DN50 (2") - option


Marking and documentation:

- Installation instructions
- Marking acc. to EN 671


Options:

- Other cabinet RAL color _____
- Cabinet made of stainless steel 304 or 316L
- Cabinet made in accordance to EN 12944 - corrosion protection level C5
- Valve cap, brass or aluminium DN50 (2")
- Valve cap cover, brass or aluminum DN50 (2")

Wall-mounted version

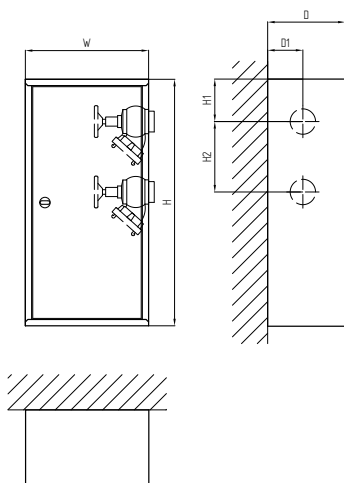

Recess-mounted version

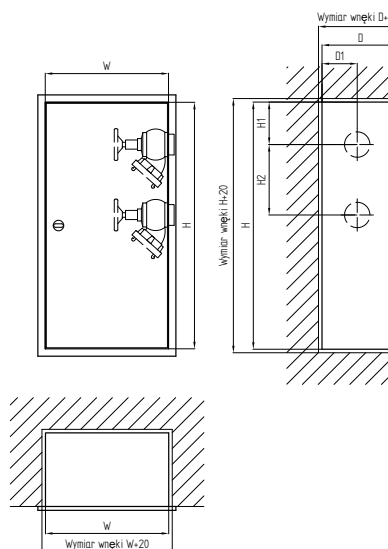

Model	Version	Hydrant valve [pcs]	Dimensions [mm]					
		DN50	W	H	H1	H2	D	D1
SWSP-N2-S	For wall-mounting	2	350	700	120	-	220	100
SWSP-W2-S	For recess-mounting	2	350	700	120	200	220	100